


DIGITAL RADIUS GAGE (LOW ACCURACY)


DATA
OUTPUT



2183

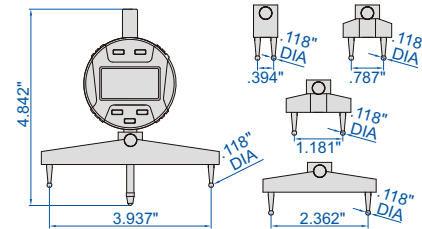


- Resolution .001"/0.01mm
- Buttons: on/off, hold, inch/mm, s (select jaws), zero
- Measure radius of internal or external arcs
- Display can be rotated by 320°
- Supplied with 5 jaws for different sizes of arc
- Battery CR2032, automatic power off (time is adjustable)
- Data output
- Optional accessory: calibration standard (part no. **2183-BLOCK**), data output cable(part no. **7315-2183, 7302-2183**)

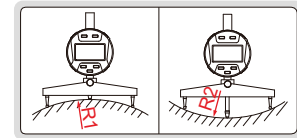

Part No.	Range of external radius (R1)	Range of internal radius (R2)	Accuracy (inch)
2183	.2-35.83"/5-910mm	.3-35.83"/7-910mm	±0.01R*

* R is the radius to be measured. For example, radius is 4", the accuracy is ±0.01x4=±0.04"

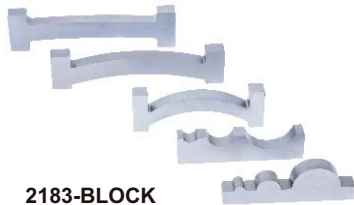

2183-BLOCK

calibration standard application



Calibration standard (optional)

Part No.	Remark
2183-BLOCK	includes 5 standard blocks