

WIRELESS DIGITAL INDICATORS (ZIGBEE)



DATA OUTPUT



2508-10EWL




2509-25EWL




2509-25PEWL




2508-50EWL




2508-10EWL
2509-10EWL

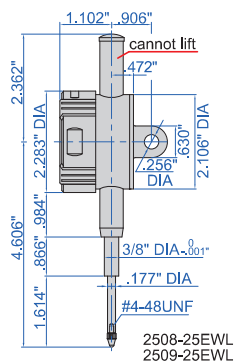

2508-25EWL
2509-25EWL

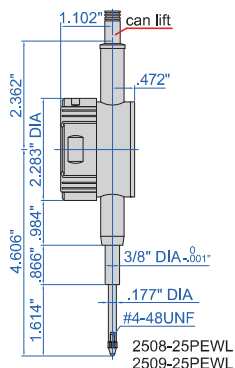

2508-25PEWL
2509-25PEWL

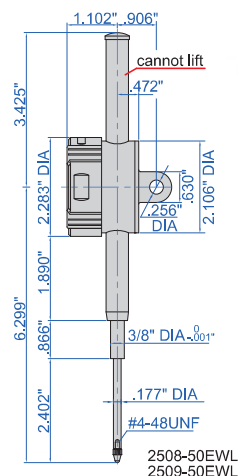

2508-50EWL
2509-50EWL

- Meet ASME B89.1.10M-2001
- Built-in wireless data transmission module, Zigbee signal
- Transmission distance is 33ft (under the condition of no obstruction and no electromagnetic interference)
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement, data output
- Keep preset data and tolerance data in memory after restart
- Automatic power off (time is adjustable)
- Power: rechargeable Li-battery
- Optional accessory: receiver (code 7315-2/3/6/7/8/9), backs, contact points

analog pointer

analog pointer




alarm when over tolerance

blink when over lower limit



max./min./TIR



Resolution .00005"/0.001mm

Part No.	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2508-10FEWL *	.5"/12.7mm	±.00015"	.00005"	.337lbf	can lift	flat back
2508-10EWL *	.5"/12.7mm	±.00015"	.00005"	.337lbf	can lift	lug back
2508-25EWL *	1"/25.4mm	±.00015"	.00005"	.495lbf	cannot lift	lug back
2508-50EWL *	2"/50.8mm	±.00015"	.00005"	.562lbf	cannot lift	lug back
2508-25PEWL *	1"/25.4mm	±.00015"	.00005"	.495lbf	can lift	flat back
2508-50PEWL *	2"/50.8mm	±.00015"	.00005"	.562lbf	can lift	flat back

Resolution .0005"/0.01mm

Part No.	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2509-10FEWL *	.5"/12.7mm	±.0015"	.0005"	.337lbf	can lift	flat back
2509-10EWL *	.5"/12.7mm	±.0015"	.0005"	.337lbf	can lift	lug back
2509-25EWL *	1"/25.4mm	±.0015"	.0005"	.495lbf	cannot lift	lug back
2509-50EWL *	2"/50.8mm	±.0015"	.0005"	.562lbf	cannot lift	lug back
2509-25PEWL *	1"/25.4mm	±.0015"	.0005"	.495lbf	can lift	flat back
2509-50PEWL *	2"/50.8mm	±.0015"	.0005"	.562lbf	can lift	flat back

* Supplied with manufacturer inspection certificate

cap lift



spindle lift knob is included



application

