



## DIGITAL RADIUS GAUGE



2511



DATA  
OUTPUT

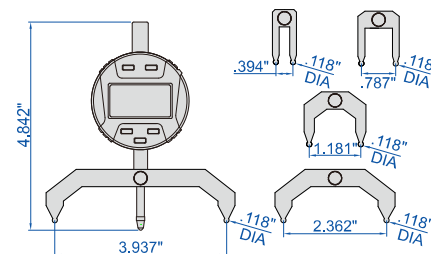

- Resolution .001"/0.01mm
- Buttons: on/off, hold, inch/mm, s (select jaws), zero
- Measure radius of internal or external arcs
- Cylindrical measuring jaws, self-positioning
- Display can be rotated by 320°
- Supplied with 5 jaws for different sizes of arc
- Battery CR2032, automatic power off (time is adjustable)
- Data output
- Optional accessory:  
calibration standard (part no. **2183-BLOCK**),  
wireless transmitter part no. **7315-50M**  
(receiver is needed) page 7,  
data output cable part no. **7302-40M**

calibration standard application



2183-BLOCK

### Calibration standard (optional)

Part No.	Remark
2183-BLOCK	includes 5 standard blocks

Part No.	Range of external radius (R1)	Range of internal radius (R2)	Accuracy (inch)
2511	.2-35.83"/5-910mm	.3-35.83"/7-910mm	±.005R*

\* R is the radius to be measured. For example, radius is 4", the accuracy is  $\pm.005 \times 4 = \pm.02$ "