


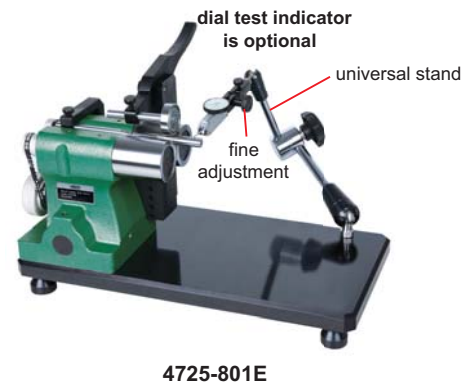
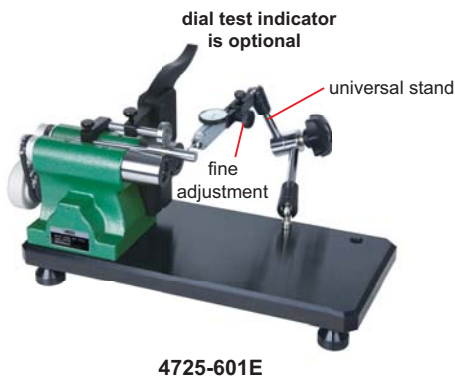
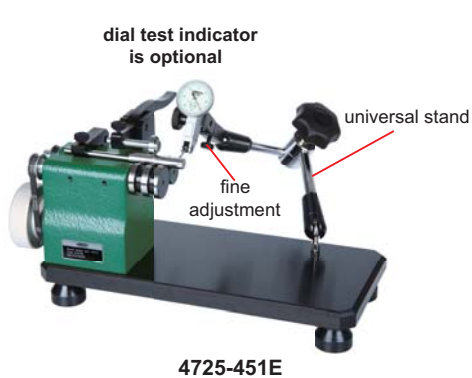
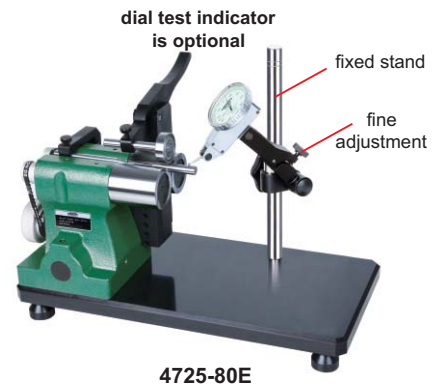
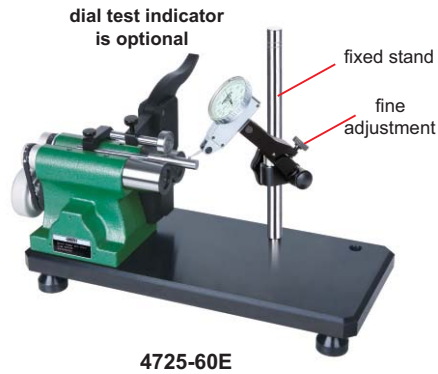


HIGH STABILITY,
LONG WORKING LIFE

CONCENTRICITY GAGES

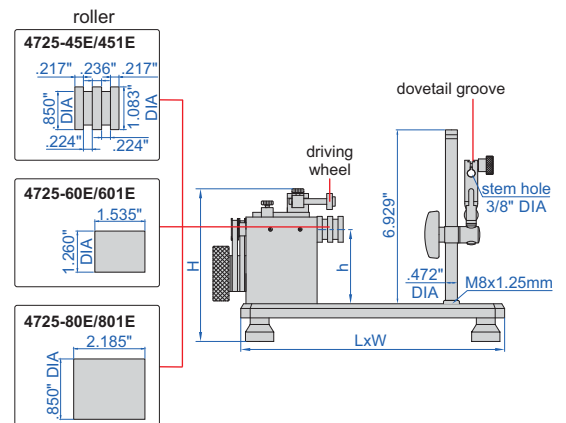

to ensure the accuracy .00008", the distance between measuring point and roller should be <1.181"



- With ball bearing, high stability, long working life
- Accuracy .00008"
- Optional accessory: dial test indicator

Part No.	Diameter range	Center height (h)	LxWxH	Weight	Remark
4725-45E	.118 -1.772"	3.150"	11.024x5.118x6.693"	13.23lb	fixed stand, high accuracy, inconvenient operation
4725-60E	.315-2.362"	3.543"	13.780x6.299x7.480"	34.39lb	fixed stand, high accuracy, inconvenient operation
4725-80E	.315 -3.150"	5.118"	15.748x7.874x9.843"	55.12lb	fixed stand, high accuracy, inconvenient operation
4725-451E	.118 -1.772"	3.150"	11.024x5.118x6.693"	13.23lb	universal stand, low accuracy, convenient operation
4725-601E	.315-2.362"	3.543"	13.780x6.299x7.480"	34.39lb	universal stand, low accuracy, convenient operation
4725-801E	.315 -3.150"	5.118"	15.748x7.874x9.843"	55.12lb	universal stand, low accuracy, convenient operation