

BOURDON TUBE PRESSURE GAUGES (LIQUID FILLED)

PART NO. 5207-□□□□□

- Stainless steel case, stainless steel ring, brass connection, brass bourdon tube
- Used for hydraulic and pneumatic systems, compressors, compressed air system, shock-proof and pulse-proof
- Suitable for fluid medium which does not clog connection port or corrode brass

STAINLESS
STEEL CASE

BRASS BOURDON
TUBE


STAINLESS
STEEL RING

BRASS
CONNECTION

CRIMP RING



5207-C4D3L2W1R14

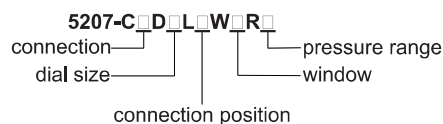

Part No. example:

5207-C4D3L2W1R14	C4-connection thread 1/4BSP
	D3-dial size 2.5" DIA
	L2-back connection position
	W1-plastic material window
	R14-pressure range (0~16bar/0~230psi)

SPECIFICATION

Accuracy class	CL 2.5 for 40mm (1.5"), 50mm (2"); CL 1.6 for 63mm (2.5"), 100mm (4")
Liquid	silicone
Ambient temperature	-20°C~60°C (-4°F~140°F)
Medium temperature	≤60°C (140°F)

Process connection

C1	1/8BSP (1.5" DIA, 2" DIA, 2.5" DIA)
C2	1/8ZG (1.5" DIA, 2" DIA, 2.5" DIA)
C3	1/8NPT (1.5" DIA, 2" DIA, 2.5" DIA)
C4	1/4BSP (1.5" DIA, 2" DIA, 2.5" DIA, 4" DIA)
C5	1/4ZG (1.5" DIA, 2" DIA, 2.5" DIA, 4" DIA)
C6	1/4NPT (1.5" DIA, 2" DIA, 2.5" DIA, 4" DIA)
C7	3/8BSP (4" DIA)
C8	3/8ZG (4" DIA)
C9	3/8NPT (4" DIA)
C10	1/2BSP (4" DIA)
C11	1/2ZG (4" DIA)
C12	1/2NPT (4" DIA)

Dial size

D1	1.5" DIA
D2	2" DIA
D3	2.5" DIA
D4	4" DIA

Connection position

L1	bottom
L2	back
L3	back connection with front flange
L4	bottom connection with back flange

Window

W1	polycarbonate
W2	tempered glass

Pressure range

R1	(-1~0bar/-30~0inHg)
R2	(-1~2bar/-30~0inHg~30psi)
R3	(-1~4bar/-30~0inHg~60psi)
R4	(-1~7bar/-30~0inHg~100psi)
R5	(0~1bar/0~15psi)
R6	(0~1.4bar/0~20psi)
R7	(0~2bar/0~30psi)
R8	(0~2.5bar/0~35psi)
R9	(0~4bar/0~60psi)
R10	(0~7bar/0~100psi)
R11	(0~10bar/0~150psi)
R12	(0~11bar/0~160psi)
R13	(0~14bar/0~200psi)
R14	(0~16bar/0~230psi)
R15	(0~20bar/0~300psi)
R16	(0~25bar/0~350psi)
R17	(0~40bar/0~600psi)
R18	(0~55bar/0~800psi)
R19	(0~60bar/0~850psi)
R20	(0~70bar/0~1000psi)
R21	(0~100bar/0~1500psi)
R22	(0~140bar/0~2000psi)
R23	(0~160bar/0~2300psi)
R24	(0~200bar/0~3000psi)
R25	(0~250bar/0~3500psi)
R26	(0~280bar/0~4000psi)
R27	(0~350bar/0~5000psi)
R28	(0~400bar/0~6000psi)
R29	(0~600bar/0~9000psi)
R30	(0~700bar/0~10000psi)