


COUNTING SCALES

DATA
OUTPUT

- Double weighing pan in stainless steel and plastic
- Counting, quantity setting, single weight setting
- Zero-setting, checking alarm, accumulation, taring
- Aluminium alloy base
- Strain balance sensor
- Data output
- Unit: kg, lb



8107-3

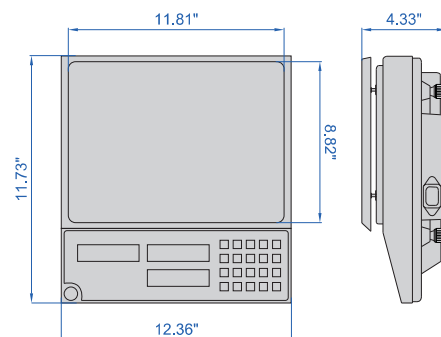

SPECIFICATION

Part No.	8107-3-U	8107-6-U	8107-15-U	8107-30-U
Maximum weighing	3kg/6.6lb	6kg/13.2lb	15kg/33lb	30kg/66lb
Minimum weighing	2g/.0044lb	4g/.0088lb	25g/.055lb	20g/.044lb
Resolution (d)	0.1g/.0001lb	0.2g/.0002lb	0.5g/.005lb	1g/.001lb
Verification interval (e)	1g/.001lb	1g/.001lb	1g/.001lb	10g/.01lb
Accuracy (m is load)	m≤1.1lb: ±.0011lb; 1.1lb<m≤4.4lb: ±.0022lb; m>4.4lb: ±.0033lb	m≤1.1lb: ±.0011lb; 1.1lb<m≤4.4lb: ±.0022lb; m>4.4lb: ±.0033lb	m≤11lb: ±.0011lb m>11lb: ±.0022lb	m≤11lb: ±.011lb 11lb<m≤44lb: ±.022lb m>44lb: ±.033lb
Output	RS232			
Operation temperature	32~104°F			
Operation humidity	≤80%RH			
Power supply	Input voltage: 110V, rechargeable lead acid battery (6V/4Ah)			
Dimension of pan	11.81×8.82"			

OPTIONAL ACCESSORY

RS232 cable	8301-CABLE*
Printer	8303-PRINTER
Data output cable (keyboard format)	7302-8001 page 14
Wireless transmitter (need receiver)	7315-8301 page 6

* Used to connect with computers



printer (optional)