

HIGH PRECISION FLOOR SCALES


CAN BE
CUSTOMIZED

HIGH
ACCURACY

DATA
OUTPUT

BUILT-IN
BLUETOOTH

- Simple counting, animal scale, checking alarm
- Peak (max.) and tracking mode
- Zero-setting, weighing, subtracting tare value
- Overload alarm
- Automatic power off
- Data output
- Unit: kg, lb

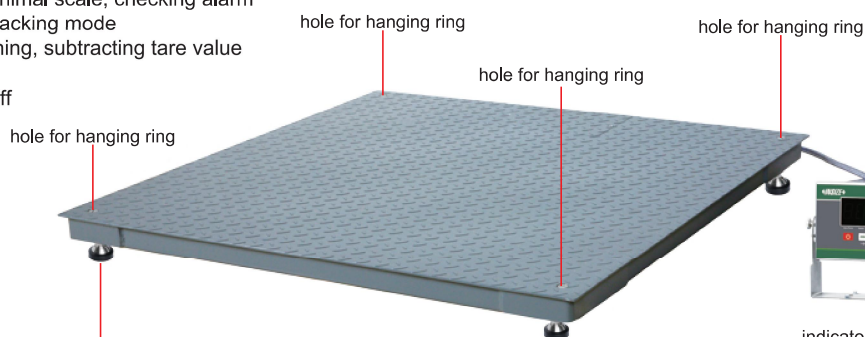


8402-3TC



metal communication
cable (included)




universal foot (included)

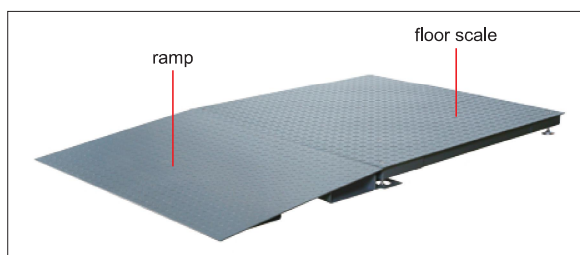

ramp (optional)



stainless steel stand (optional)

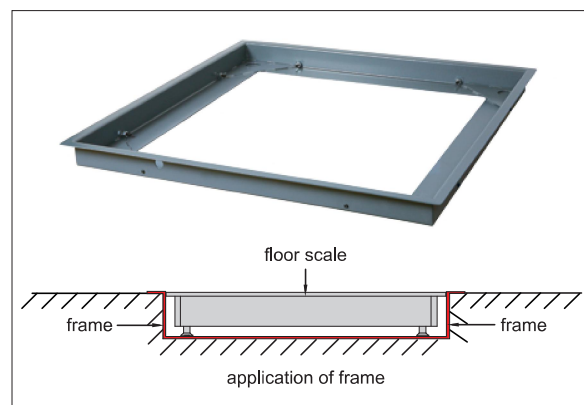

frame (optional)

STANDARD DELIVERY

Main unit	1 pc
Indicator	1 pc
Power adapter	1 pc
Universal foot	4 pcs
Hanging ring	4 pcs

OPTIONAL ACCESSORY

Ramp	customizable
Frame	customizable
Alarm light	8402-ALARM (must be supplied with scales together)
Stainless steel stand	8402-STAND
Printer	8402-PRINTER

SPECIFICATION


Material of platform	carbon steel
Material of indicator	304 stainless steel
Output	RS232
Operation temperature	14~104°F
Operation humidity	30~80%RH
Power	3.7V rechargeable Li-ion battery



printer (optional)

Part No.	Maximum weighing	Minimum weighing	Resolution (d)	Accuracy	Dimension of platform
8402-1TA	1t/2204lb	4kg/8.8lb	0.2kg/.4lb	±.44lb	31.5×31.5"
8402-2TA	2t/4409lb	4kg/8.8lb	0.2kg/.4lb	±.66lb	
8402-3TA	3t/6613lb	4kg/8.8lb	0.2kg/.4lb	±1.1lb	
8402-4TA	4t/8818lb	10kg/22lb	0.5kg/1.1lb	±1.3lb	
8402-5TA	5t/11023lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-1TB	1t/2204lb	4kg/8.8lb	0.2kg/.4lb	±.44lb	39.4×39.4"
8402-2TB	2t/4409lb	4kg/8.8lb	0.2kg/.4lb	±.66lb	
8402-3TB	3t/6613lb	4kg/8.8lb	0.2kg/.4lb	±1.1lb	
8402-4TB	4t/8818lb	10kg/22lb	0.5kg/1.1lb	±1.3lb	
8402-5TB	5t/11023lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-1TC	1t/2204lb	4kg/8.8lb	0.2kg/.4lb	±.44lb	47.2×47.2"
8402-2TC	2t/4409lb	4kg/8.8lb	0.2kg/.4lb	±.66lb	
8402-3TC	3t/6613lb	4kg/8.8lb	0.2kg/.4lb	±1.1lb	
8402-4TC	4t/8818lb	10kg/22lb	0.5kg/1.1lb	±1.3lb	
8402-5TC	5t/11023lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	

Part No.	Maximum weighing	Minimum weighing	Resolution (d)	Accuracy	Dimension of platform
8402-1TD	1t/2204lb	4kg/8.8lb	0.2kg/.4lb	±.44lb	47.2×59.1"
8402-2TD	2t/4409lb	4kg/8.8lb	0.2kg/.4lb	±.66lb	
8402-3TD	3t/6613lb	4kg/8.8lb	0.2kg/.4lb	±1.1lb	
8402-4TD	4t/8818lb	10kg/22lb	0.5kg/1.1lb	±1.3lb	
8402-5TD	5t/11023lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-1TE	1t/2204lb	4kg/8.8lb	0.2kg/.4lb	±.44lb	59.1×59.1"
8402-2TE	2t/4409lb	4kg/8.8lb	0.2kg/.4lb	±.66lb	
8402-3TE	3t/6613lb	4kg/8.8lb	0.2kg/.4lb	±1.1lb	
8402-4TE	4t/8818lb	10kg/22lb	0.5kg/1.1lb	±1.3lb	
8402-5TE	5t/11023lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-1TF	1t/2204lb	10kg/22lb	0.5kg/1.1lb	±1.1lb	78.7×78.7"
8402-2TF	2t/4409lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-3TF	3t/6613lb	10kg/22lb	0.5kg/1.1lb	±2.2lb	
8402-4TF	4t/8818lb	20kg/44lb	1kg/2.2lb	±4.4lb	
8402-5TF	5t/11023lb	20kg/44lb	1kg/2.2lb	±4.4lb	

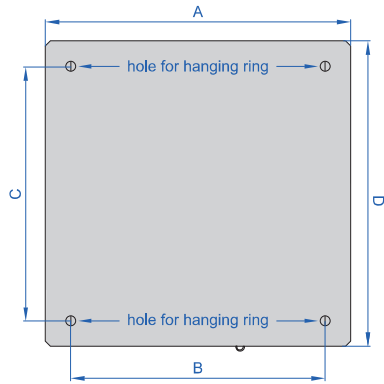

Unit: in

Part No.	A	B	C	D	E	F	G
8402-1TA	31.5	25.2	25.2	31.5	25.2	1.57	3.19
8402-2TA	31.5	25.2	25.2	31.5	25.2	1.57	3.19
8402-3TA	31.5	25.2	25.2	31.5	25.2	1.57	3.19
8402-4TA	31.5	25.2	25.2	31.5	25.2	1.50	3.27
8402-5TA	31.5	25.2	25.2	31.5	25.2	1.50	3.27
8402-1TB	39.4	33.1	33.1	39.4	33.1	1.57	3.19
8402-2TB	39.4	33.1	33.1	39.4	33.1	1.57	3.19
8402-3TB	39.4	33.1	33.1	39.4	33.1	1.57	3.19
8402-4TB	39.4	33.1	33.1	39.4	33.1	1.50	3.27
8402-5TB	39.4	33.1	33.1	39.4	33.1	1.50	3.27
8402-1TC	47.2	40.9	40.9	47.2	40.9	1.57	3.19
8402-2TC	47.2	40.9	40.9	47.2	40.9	1.57	3.19
8402-3TC	47.2	40.9	40.9	47.2	40.9	1.57	3.19
8402-4TC	47.2	40.9	40.9	47.2	40.9	1.50	3.27
8402-5TC	47.2	40.9	40.9	47.2	40.9	1.50	3.27



Unit: in

Part No.	A	B	C	D	E	F	G
8402-1TD	47.2	40.9	52.8	59.1	40.9	1.57	3.19
8402-2TD	47.2	40.9	52.8	59.1	40.9	1.57	3.19
8402-3TD	47.2	40.9	52.8	59.1	40.9	1.57	3.19
8402-4TD	47.2	40.9	52.8	59.1	40.9	1.50	3.27
8402-5TD	47.2	40.9	52.8	59.1	40.9	1.50	3.27
8402-1TE	59.1	52.8	52.8	59.1	52.8	1.57	3.19
8402-2TE	59.1	52.8	52.8	59.1	52.8	1.57	3.19
8402-3TE	59.1	52.8	52.8	59.1	52.8	1.57	3.19
8402-4TE	59.1	52.8	52.8	59.1	52.8	1.50	3.27
8402-5TE	59.1	52.8	52.8	59.1	52.8	1.50	3.27
8402-1TF	78.7	72.4	72.4	78.7	72.4	1.57	3.19
8402-2TF	78.7	72.4	72.4	78.7	72.4	1.57	3.19
8402-3TF	78.7	72.4	72.4	78.7	72.4	1.57	3.19
8402-4TF	78.7	72.4	72.4	78.7	72.4	1.50	3.27
8402-5TF	78.7	72.4	72.4	78.7	72.4	1.50	3.27