



DIGITAL TORQUE WRENCHES (BASIC TYPE)

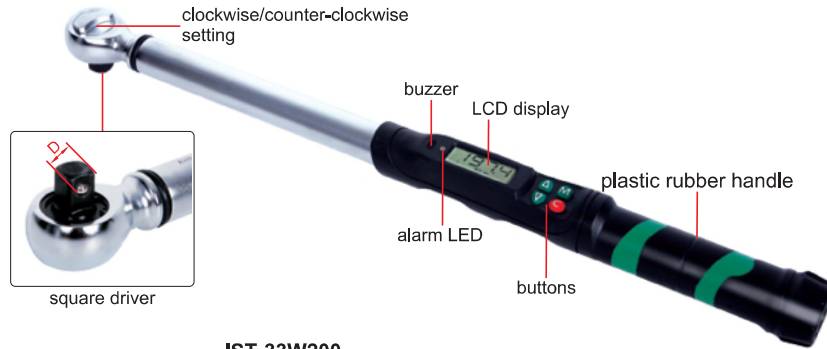


**IST-33W200
type A**

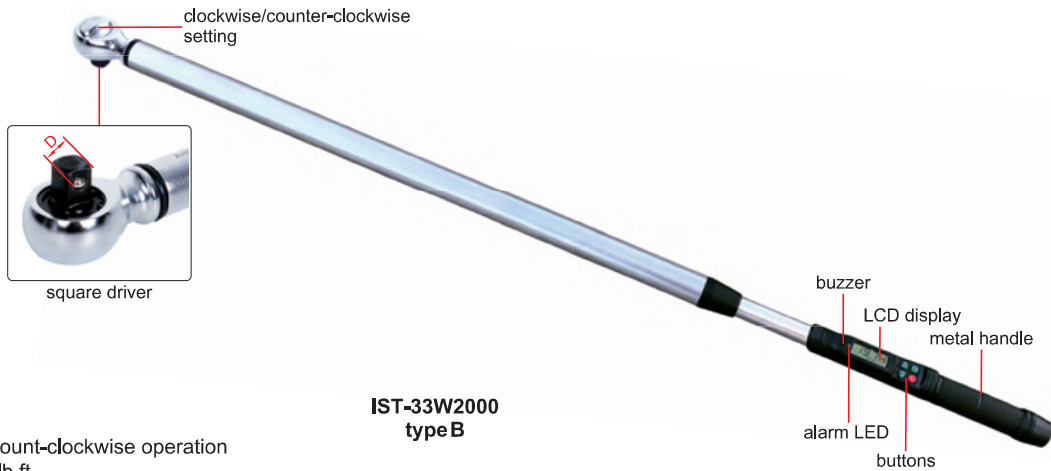

**IST-33W2000
type B**

- Clockwise and count-clockwise operation
- Unit: N.m, lb.in, lb.ft
- Peak and track working mode
- Target torque value can be set, with audible and visible alarm (alarm LED and buzzer):
 - Yellow LED light on when approaching target value, green LED light on when reaching target value, red LED light on when exceeding target value
 - Intermittent alarm when approaching target value, rapid alarm when reaching target value, long-lasting alarm when exceeding target value
- Real-time display of % difference from target value when approaching
- Power off automatically in 2 minutes without any operations

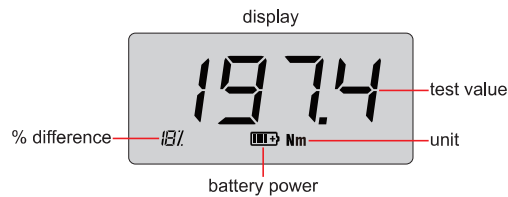

SPECIFICATION

Part No.	Type	Range		Accuracy	Resolution		Square driver (D)	Power supply	Length	Weight
IST-33W20	A	17.7~177lb.in	2~20N.m	clockwise: ±2% counter-clockwise: ±3%	0.1lb.in	0.01N.m	1/4"	3×AAA batteries	15.47"	1.76lb
IST-33W30		26.6~266lb.in	3~30N.m		0.1lb.in	0.01N.m	3/8"		15.94"	1.83lb
IST-33W50		44.3~443lb.in	5~50N.m		0.1lb.in	0.01N.m	3/8"		17.52"	2.03lb
IST-33W100		7.4~73.8lb.ft	10~100N.m		0.1lb.ft	0.1N.m	3/8"		18.70"	2.16lb
IST-33W200		14.8~148lb.ft	20~200N.m		0.1lb.ft	0.1N.m	1/2"		20.28"	2.42lb
IST-33W300		22.1~221lb.ft	30~300N.m		0.1lb.ft	0.1N.m	1/2"		22.95"	2.75lb
IST-33W400		29.5~295lb.ft	40~400N.m		0.1lb.ft	0.1N.m	3/4"		31.50"	7.27lb
IST-33W600	B	44.3~443lb.ft	60~600N.m		0.1lb.ft	0.1N.m	3/4"		41.34"	10.13lb
IST-33W800		59.0~590lb.ft	80~800N.m		0.1lb.ft	0.1N.m	3/4"		49.21"	11.46lb
IST-33W1000		73.8~738lb.ft	100~1000N.m		0.1lb.ft	0.1N.m	3/4"		49.21"	11.46lb
IST-33W1500		110~1100lb.ft	150~1500N.m		1lb.ft	1N.m	1"		49.80"	13.44lb
IST-33W2000		150~1500lb.ft	200~2000N.m		1lb.ft	1N.m	1"		49.80"	14.32lb