


TORQUE WRENCHES

ATTENTION: CLOCKWISE
OPERATION ONLY

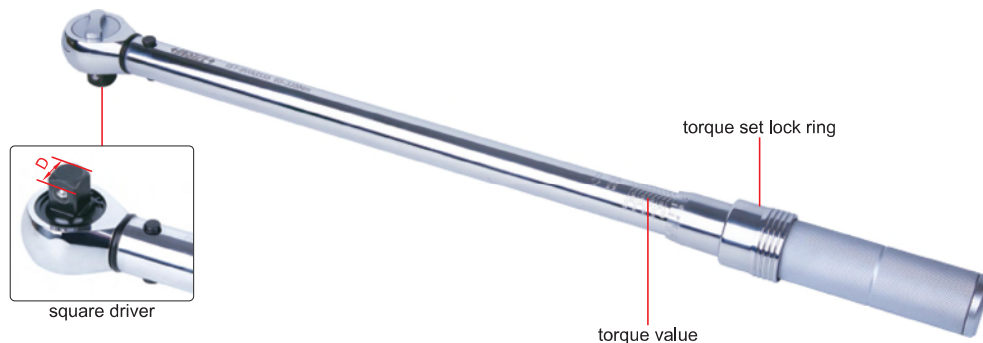

- Ratchet head
- According to DIN ISO 6789,
ASME B107.300
- All-metal construction,
sturdy and durable

IST-9WM335

SPECIFICATION

Part No.	Range (clockwise)	Accuracy	Graduation	Square driver (D)	Length	Weight
IST-9WM5S	1~5N.m	±3%	0.05N.m	1/4"	7.20"	.661lb
IST-9WM10S	2~10N.m		0.1N.m	1/4"	7.68"	.705lb
IST-9WM12	2.5~12N.m		0.05N.m	1/4"	11.42"	1.50lb
IST-9WM20	4~20N.m		0.1N.m	1/4"	11.42"	1.50lb
IST-9WM30	6~30N.m		0.2N.m	3/8"	12.52"	1.81lb
IST-9WM60	10~60N.m		0.5N.m	3/8"	15.28"	2.12lb
IST-9WM100	20~100N.m		0.5N.m	1/2"	17.44"	2.29lb
IST-9WM125	25~125N.m		0.5N.m	1/2"	17.44"	2.29lb
IST-9WM200	40~200N.m		1N.m	1/2"	18.43"	2.56lb
IST-9WM335	65~335N.m		1N.m	1/2"	20.79"	2.86lb
IST-9WM500	100~500N.m		2.5N.m	3/4"	33.66"	11.02lb
IST-9WM800	160~800N.m	±3% (≤500N.m)	4N.m	3/4"	41.54"	13.00lb
IST-9WM1000	200~1000N.m	±4% (>500N.m)	5N.m	3/4"	41.54"	13.00lb
IST-9WM1500	300~1500N.m	±3% (≤500N.m)	5N.m	1"	49.61"	20.27lb
IST-9WM2000	400~2000N.m	±4% (>500N.m)	10N.m	1"	49.61"	20.27lb
IST-9WM3000	600~3000N.m	±4%	15N.m	1"	49.61"	23.13lb
IST-9WM1500L	300~1500N.m	±3% (≤500N.m)	5N.m	1"	62.99"	28.64lb
IST-9WM2000L	400~2000N.m	±4% (>500N.m)	10N.m	1"	62.99"	28.64lb
IST-9WM3000L	600~3000N.m	±4%	15N.m	1"	72.44"	33.49lb